


### High-visibility, IP66/NEMA4 Protection Total Counter/Time Counter Range

- IP66 (JEM standard IP66G: oil resistance) and NEMA4 protection standards.
- Switch between NPN and PNP operation.
- Both external and manual resets provided.
- Finger-protection terminal block cover prevents electrical shocks conforming to VDE0106/100.
- Conforms to EMC standards.
- Conforms to IEC standards, and approved by UL and CSA.
- Wide power supply range.
- Six-language instruction manual provided.

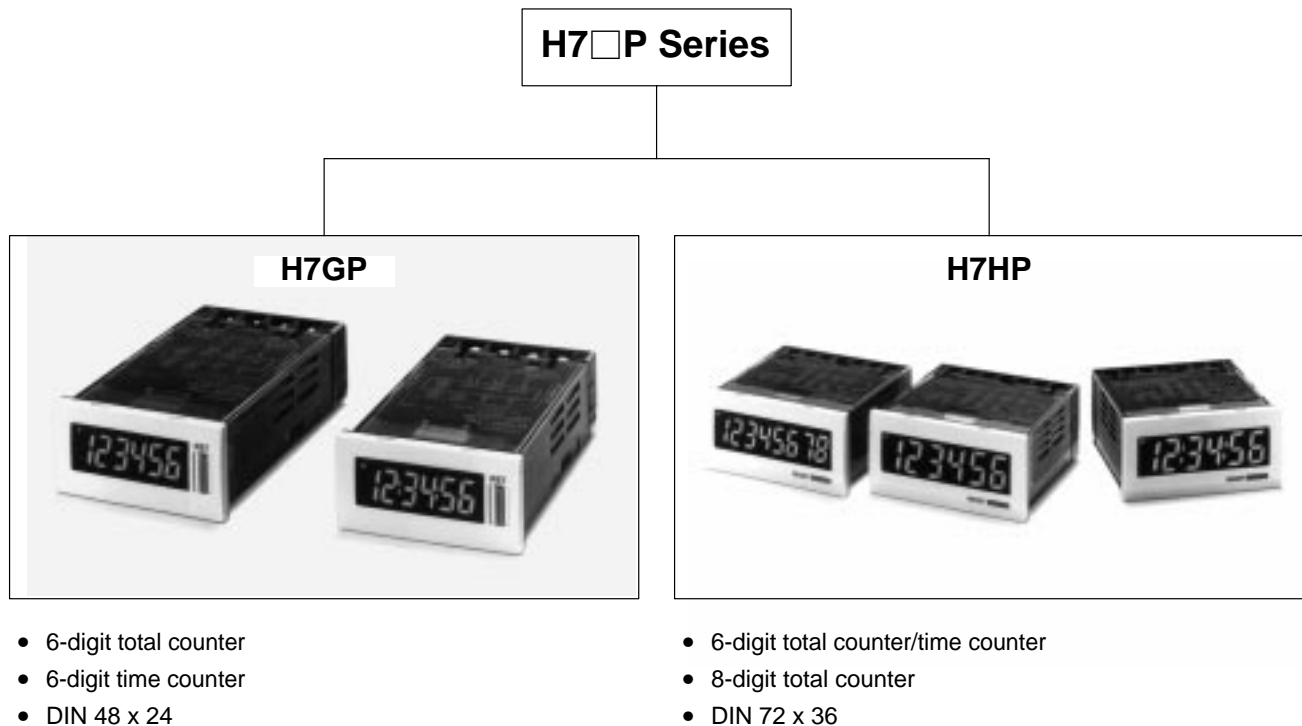

### Contents

#### Total Counter/Time Counter

H7GP .....	2
H7HP .....	8

#### Common to Both Counters

Input Connections .....	14
Precautions .....	15
Enclosure Ratings .....	16

## Total Counter/Time Counter (DIN 48 x 24)

# H7GP

**Compact Total Counters and Time Counters with Easy-to-read Displays and IP66G/NEMA4 Water and Oil Resistance**

- High-visibility, negative transmissive LCD display with 8.5-mm-high characters and built-in red LED backlight at low power consumption.
- Compact (80 mm) body.



## Ordering Information

Supply voltage	6-digit total counter		6-digit time counter	
	Light gray	Black	Light gray	Black
100 to 240 VAC	H7GP-C	H7GP-CB	H7GP-T	H7GP-TB
12 to 24 VDC	H7GP-CD	H7GP-CDB	H7GP-TD	H7GP-TDB

### Model Number Legend:

H7GP-□□□  
1 2 3

**1. Classification**

C: Total counter  
T: Time counter

**2. Supply Voltage**

None: 100 to 240 VAC  
D: 12 to 24 VDC

**3. Case Color of Front Section**

None: Light gray (Munsell 5Y7/1)  
B: Black

# Specifications

## ■ Ratings

Item	6-digit total counter		6-digit time counter		
	H7GP-C	H7GP-CD	H7GP-T	H7GP-TD	
<b>Rated supply voltage</b>	100 to 240 VAC (50/60 Hz)	12 to 24 VDC (see note 1)	100 to 240 VAC (50/60 Hz)	12 to 24 VDC (see note 1)	
<b>External power supply</b>	50 mA at 12 VDC	---	50 mA at 12 VDC	---	
<b>Operating voltage range</b>	85% to 110% of rated supply voltage				
<b>Power consumption</b>	100 to 240 VAC: 6.5 VA max. 12 to 24 VDC: 0.6 W max.				
<b>Dimensions</b>	48 x 24 x 80 mm (W x H x D)				
<b>Mounting method</b>	Flush mounting				
<b>External connections</b>	Screw terminals				
<b>Enclosure ratings</b>	Panel surface: JEM IP66G and NEMA Type 4 (indoors)				
<b>Display</b>	7-segment, negative transmissive LCD (with red backlight)				
<b>Digits</b>	6 digits (8.5-mm-high characters)				
<b>Input mode</b>	Up (increment)		Accumulative		
<b>Max. counting speeds</b>	30 Hz (cps) or 5 kHz (kcps) (selected via DIP switch)		---		
<b>Counting range</b>	0 to 999999		---		
<b>Time specification</b>	---		0.1 to 99999.9 h/1 s to 99 h 59 min 59 s		
<b>Timing accuracy</b>	---		±100 ppm (−10°C to 55°C)		
<b>Memory backup</b>	EEP-ROM: 200,000 operations min.				
<b>Input</b>	<b>Input signals</b>	Count, reset, and key protection (see note 2)		Start, reset, and key protection (see note 2)	
	<b>Input method</b>	No-voltage input (NPN transistor input) or voltage input (PNP transistor input) (selected via DIP switch)			
	<b>Count, reset, start</b>	No-voltage input (NPN transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. Short-circuit (ON) residual voltage: 2 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.  Voltage input (PNP transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. ON voltage: 9 to 24 VDC OFF voltage: 5 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.			
	<b>Key protection</b>	No-voltage input (NPN transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. Short-circuit (ON) residual voltage: 0.5 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.			
<b>Input response speed</b>	<b>Reset</b>	20 or 1 ms (automatically switched according to counting speed)		20 ms	
	<b>Start</b>	---		20 ms	
	<b>Key protection</b>	Approx. 1 s		Approx. 1 s	
<b>Reset system</b>	External and manual resets				


**Note:** 1. Contains 20% ripple (p-p) max.

2. Only a non-voltage input (NPN transistor) is possible for the key protection input. Switching between the NPN and PNP input methods does not affect the key protection input, i.e., a PNP input cannot be used.

## ■ Characteristics

<b>Insulation resistance</b>	100 M $\Omega$ min. (at 500 VDC)
<b>Dielectric strength</b>	2,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (AC model) 1,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (DC model) 2,000 VAC, 50/60 Hz for 1 min between power terminals and control input terminals (AC model)
<b>Impulse withstand voltage</b>	3 kV (between power terminals) (1 kV for 12-to-24-VDC models) 4.5 kV (between current-carrying terminal and exposed non-current-carrying metal parts) (1.5 kV for 12-to-24-VDC models)
<b>Noise immunity</b>	$\pm$ 1.5 kV (between AC power terminals), $\pm$ 480 V (between DC power terminals), $\pm$ 480 V (between input terminals); square-wave noise by noise simulator (pulse width: 100 ns/1 $\mu$ s, 1-ns rise)
<b>Static immunity</b>	Display: Malfunction: 8 kV Destruction: 15 kV DIP switch: Malfunction: 4 kV Destruction: 8 kV
<b>Vibration resistance</b>	Destruction: 10 to 55 Hz with 0.75-mm single amplitude each in three directions Malfunction: 10 to 55 Hz with 0.5-mm single amplitude each in three directions
<b>Shock resistance</b>	Destruction: 294 m/s <sup>2</sup> (30G) each in three directions Malfunction: 196 m/s <sup>2</sup> (20G) each in three directions
<b>Ambient temperature</b>	Operating: $-10^{\circ}\text{C}$ to $55^{\circ}\text{C}$ (with no icing) Storage: $-25^{\circ}\text{C}$ to $65^{\circ}\text{C}$ (with no icing)
<b>Ambient humidity</b>	Operating: 35% to 85%
<b>EMC</b>	(EMI): EN50081-2 Emission Enclosure: EN55011 Group 1 class A Emission AC Mains: EN55011 Group 1 class A (EMS): EN50082-2 Immunity ESD: EN61000-4-2: 4 kV contact discharge 8 kV air discharge Immunity RF-interference: ENV50140: 10 V/m (Amplitude-modulated, 80 MHz to 1 GHz) 10 V/m (Pulse-modulated, 900 MHz) Immunity Conducted Disturbance: ENV50141: 10 V (0.15 to 80 MHz) Immunity Burst: EN61000-4-4: 2 kV power-line 2 kV I/O signal-line
<b>Approved standards</b>	UL508, CSA22.2 No.14, conforms to IEC61010-1/EN61010-1, EN50081-2, EN50082-2, VDE0106/P100
<b>Case color</b>	Rear section: Gray smoke; Front section: 5Y7/1 (light gray) or N1.5 (black)
<b>Weight</b>	Approx. 76 g

# Nomenclature

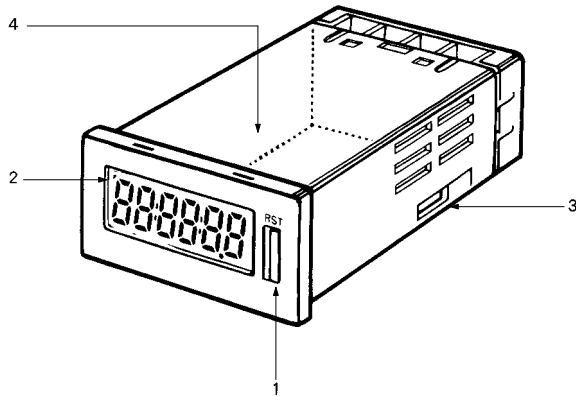

1. **Reset Key**  
Resets the count value, but will not operate while the keys are protected.
2. **Key Protection Indicator**  
Lit while the keys are protected. (Reset Key is disabled.).
3. **NPN/PNP DIP Switch**  
(Count or start with reset)  
When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on. See below for details.
4. **Counting Speed DIP Switch (H7GP-C)**  
**Time Range DIP Switch (H7GP-T)**  
When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on. Refer to *DIP Switch Setting* for details.

# Operation

## ■ DIP Switch Settings

Set all DIP switches before mounting the Counter to a control panel. All switches are set toward the display panel before shipping.

### H7GP-C/-CD

Switch	Item	Function	
3 (On right side from front)	Input mode (note 1)	Display side	NPN
		Terminal side	PNP
4 (On left side from front)	Counting speed (note 1)	Display side	30 Hz
		Terminal side	5 kHz


### H7GP-T/-TD

Switch	Item	Function	
3 (On right side from front)	Input mode (note 1)	Display side	NPN
		Terminal side	PNP
4 (On left side from front)	Time range (note 1)	Display side	99999.9h (note 2)
		Terminal side	99 h 59 m 59 s


- Note:**
1. When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on.
  2. The decimal point will flash every second when "99999.9 h" is set.

## ■ Operating Modes

### Total Counters

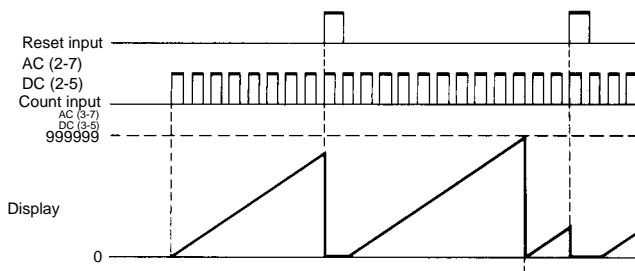

### Time Counters

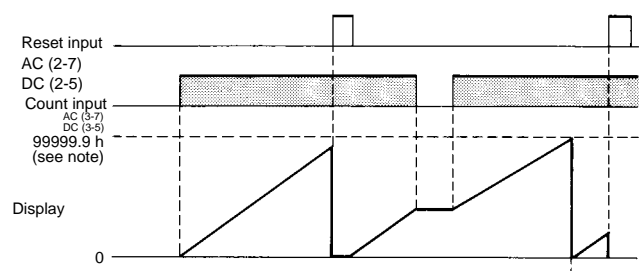


**Note:** Display values are shown for full scale set to 99999.9 h.

# Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

H7GP-C  
H7GP-T

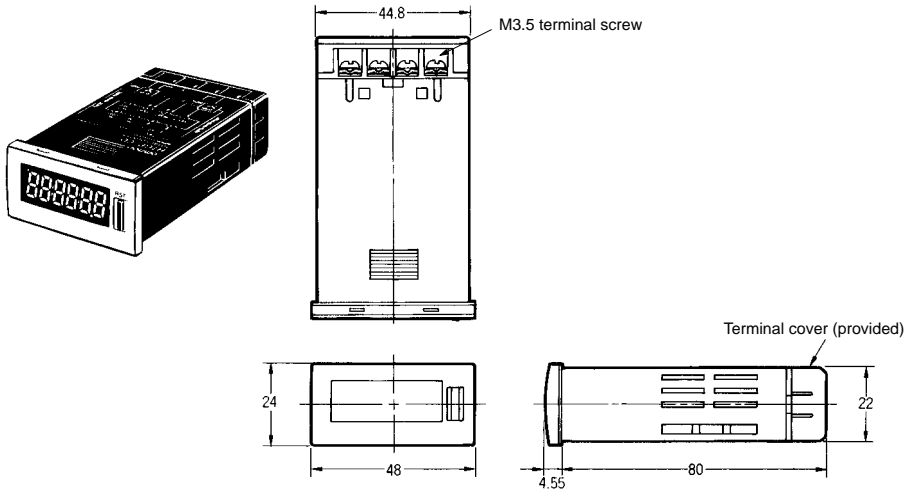


### Panel Cutouts

Panel cutouts are as shown below (according to DIN43700).



- Note:**
1. The mounting panel thickness should be 1 to 6 mm.
  2. Water resistance will be lost if Counters are mounted side-by-side.

### With Flush Mounting Bracket

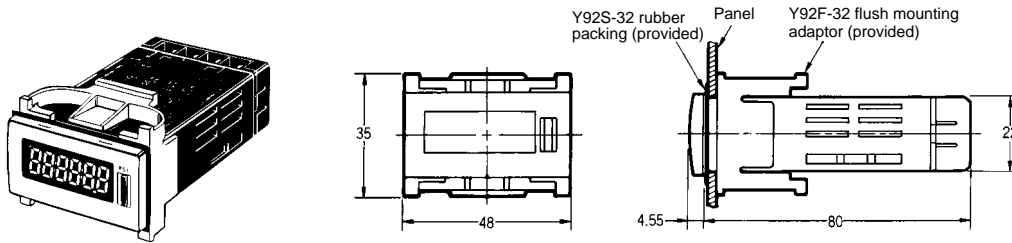


# Installation


## Terminal Arrangement

### AC Models

#### H7GP-C

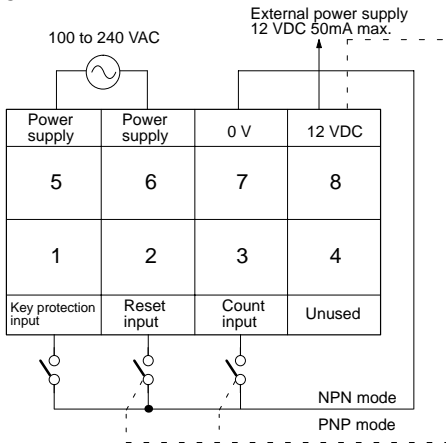


#### H7GP-T

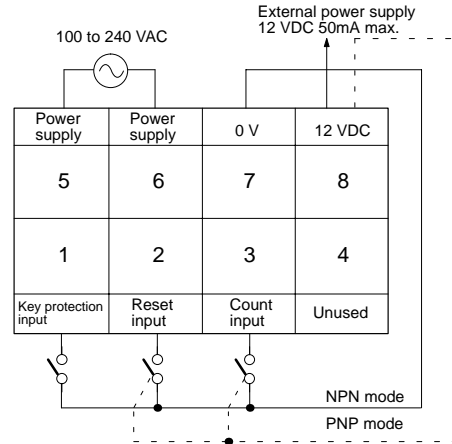


### DC Models

#### H7GP-CD

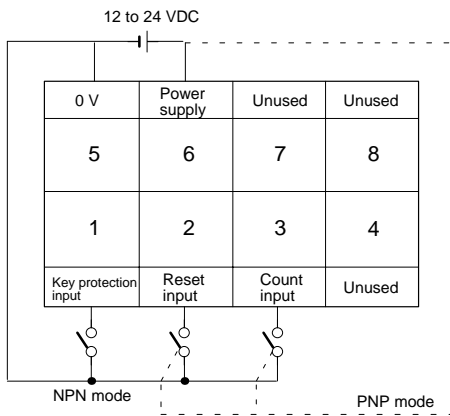

#### H7GP-TD

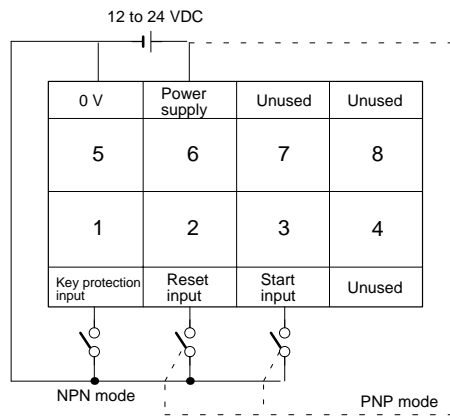

### Compact Total Counters and Time Counters with Easy-to-read Displays and IP66G/NEMA4 Water and Oil Resistance

- Large, easy-to-read displays: 15-mm-high characters for 6-digit models; 12-mm-high characters for 8-digit models.
- High-visibility, negative transmissive LCD display with built-in red LED backlight at low power consumption.
- Compact (66 mm) body.
- Switch 6-digit models between total counter and time counter operation.



## Ordering Information

Supply voltage	6-digit total counter/time counter		8-digit total counter	
	Light gray	Black	Light gray	Black
100 to 240 VAC	H7HP-A	H7HP-AB	H7HP-C8	H7HP-C8B
12 to 24 VDC	H7HP-AD	H7HP-ADB	H7HP-C8D	H7HP-C8DB

### Model Number Legend:

H7HP-□□□□  
1 2 3 4

#### 1. Classification

- A: Total counter/time counter
- C: Total counter

#### 2. Digits

- None: 6 digits
- 8: 8 digits

#### 3. Supply Voltage

- None: 100 to 240 VAC
- D: 12 to 24 VDC

#### 4. Case Color

- None: Light gray (Munsell 5Y7/1)
- B: Black



# Specifications

## ■ Ratings

Item	6-digit total counter/time counter		8-digit total counter	
	H7HP-A	H7HP-AD	H7HP-C8	H7HP-C8D
<b>Rated supply voltage</b>	100 to 240 VAC (50/60 Hz)	12 to 24 VDC (see note 1)	100 to 240 VAC (50/60 Hz)	12 to 24 VDC (see note 1)
<b>External power supply</b>	50 mA at 12 VDC	---	50 mA at 12 VDC	---
<b>Operating voltage range</b>	85% to 110% of rated supply voltage			
<b>Power consumption</b>	100 to 240 VAC: 6.5 VA max. 12 to 24 VDC: 0.6 W max.			
<b>Dimensions</b>	72 x 36 x 66 mm (W x H x D)			
<b>Mounting method</b>	Flush mounting			
<b>External connections</b>	Screw terminals			
<b>Enclosure ratings</b>	Panel surface: IEC IP66 (JEM standard IP66G) and NEMA Type 4 (indoors)			
<b>Display</b>	7-segment, negative transmissive LCD (with red backlight)			
<b>Digits</b>	6 digits (15-mm-high characters)		8 digits (12-mm-high characters)	
<b>Function</b>	Total counter/time counter (selected via DIP switch)		Total counter	
<b>Input mode</b>	Up/down (total counter) or accumulative (time counter)		Up/down	
<b>Max. counting speeds</b>	30 Hz (cps) or 5 kHz (kcps) (selected via DIP switch)			
<b>Counting range</b>	-99999 to 999999		-9999999 to 99999999	
<b>Time specification</b>	0.1 to 99999.9 h/1 s to 99 h 59 min 59 s		---	
<b>Timing accuracy</b>	±100 ppm (-10°C to 55°C)		---	
<b>Memory backup</b>	EEP-ROM: 200,000 operations min.			
<b>Input</b>	<b>Input signals</b>	Count 1 (increment), count 2 (decrement), reset, and key protection (see note 2)		
	<b>Input method</b>	No-voltage input (NPN transistor input) or voltage input (PNP transistor input) (selected via DIP switch)		
	<b>Count, start, gate, reset</b>	No-voltage input (NPN transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. Short-circuit (ON) residual voltage: 2 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.  Voltage input (PNP transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. ON voltage: 9 to 24 VDC OFF voltage: 5 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.		
	<b>Key protection</b>	No-voltage input (NPN transistor input) Short-circuit (ON) impedance: 1 K $\Omega$ max. Short-circuit (ON) residual voltage: 0.5 VDC max. Open (OFF) impedance: 100 k $\Omega$ min.		
<b>Input response speed</b>	<b>Reset</b>	Time counter: 20 ms; total counter: 20 or 1 ms (automatically switched according to counting speed)		
	<b>Start</b>	Time counter: 20 ms		
	<b>Key protection</b>	Approx. 1 s	Approx. 1 s	
<b>Reset system</b>	External and manual resets			


**Note:** 1. Contains 20% ripple (p-p) max.

2. Only a non-voltage input (NPN transistor) is possible for the key protection input. Switching between the NPN and PNP input methods does not affect the key protection input, i.e., a PNP input cannot be used.

## ■ Characteristics

<b>Insulation resistance</b>	100 M $\Omega$ min. (at 500 VDC)
<b>Dielectric strength</b>	2,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (AC model) 1,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (DC model) 2,000 VAC, 50/60 Hz for 1 min between power terminals and control input terminals (AC model)
<b>Impulse withstand voltage</b>	3 kV (between power terminals) (1 kV for 12-to-24-VDC models) 4.5 kV (between current-carrying terminal and exposed non-current-carrying metal parts) (1.5 kV for 12-to-24-VDC models)
<b>Noise immunity</b>	$\pm$ 1.5 kV (between AC power terminals), $\pm$ 480 V (between DC power terminals), $\pm$ 480 V (between input terminals); square-wave noise by noise simulator (pulse width: 100 ns/1 $\mu$ s, 1-ns rise)
<b>Static immunity</b>	Display: Malfunction: 8 kV Destruction: 15 kV DIP switch: Malfunction: 4 kV Destruction: 8 kV
<b>Vibration resistance</b>	Destruction: 10 to 55 Hz with 0.75-mm single amplitude each in three directions Malfunction: 10 to 55 Hz with 0.5-mm single amplitude each in three directions
<b>Shock resistance</b>	Destruction: 294 m/s <sup>2</sup> (30G) each in three directions Malfunction: 196 m/s <sup>2</sup> (20G) each in three directions
<b>Ambient temperature</b>	Operating: $-10^{\circ}\text{C}$ to $55^{\circ}\text{C}$ (with no icing) Storage: $-25^{\circ}\text{C}$ to $65^{\circ}\text{C}$ (with no icing)
<b>Ambient humidity</b>	Operating: 35% to 85%
<b>EMC</b>	(EMI): EN50081-2 Emission Enclosure: EN55011 Group 1 class A Emission AC Mains: EN55011 Group 1 class A (EMS): EN50082-2 Immunity ESD: EN61000-4-2: 4 kV contact discharge 8 kV air discharge Immunity RF-interference: ENV50140: 10 V/m (Amplitude-modulated, 80 MHz to 1 GHz) 10 V/m (Pulse-modulated, 900 MHz) Immunity Conducted Disturbance: ENV50141: 10 V (0.15 to 80 MHz) Immunity Burst: EN61000-4-4: 2 kV power-line 2 kV I/O signal-line
<b>Approved standards</b>	UL508, CSA22.2 No.14, conforms to IEC61010-1/EN61010-1, EN55011, EN50081-2, EN50082-2, VDE0106/P100
<b>Case color</b>	Rear section: Gray smoke; Front section: 5Y7/1 (light gray) or N1.5 (black)
<b>Weight</b>	Approx. 106 g

## Nomenclature

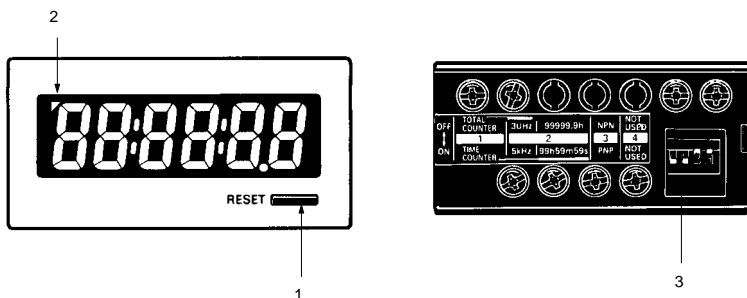

(The figure shows the DIP switch label stuck to the rear of the case.)

- 1. Reset Key**  
Resets the count value, but will not operate while the keys are protected.
- 2. Key Protection Indicator**  
Lit while the keys are protected (Reset Key is disabled.).
- 3. DIP Switch**  
Use to change a setting. Refer to *DIP Switch Settings* for details.

# Operation

## ■ DIP Switch Settings

Switches 1 to 4 are all set to OFF before shipping.



### H7HP-A/-AD

Pin no.	Item	OFF	ON
1	Function	Total counter	Time counter
2	Counting speed	30 Hz	5 kHz
	Time range	99999.9 h	99 h 59 m 59 s
3	Input mode (note)	NPN	PNP
4	Unused	---	---


### H7HP-C8/-C8D

Pin no.	Item	OFF	ON
1	Unused	---	---
2	Counting speed	30 Hz	5 kHz
3	Input mode (note)	NPN	PNP
4	Unused	---	---

**Note:** When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on.


## ■ Operating Modes

### Total Counters

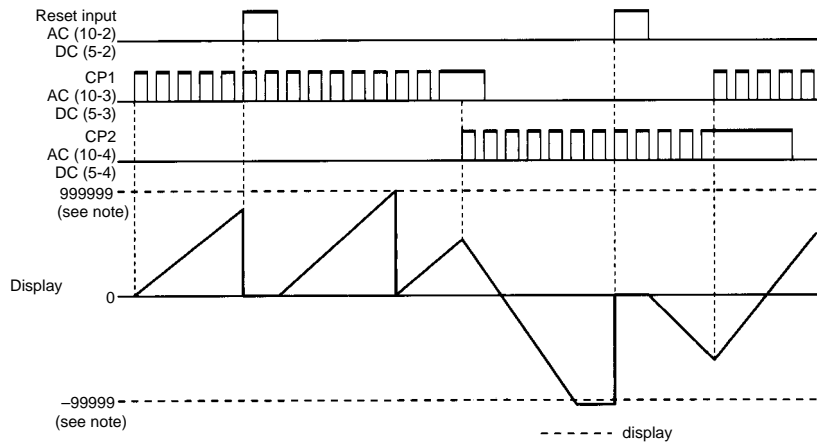

**Note:** Display values are shown for a 6-digit model.

### Time Counters


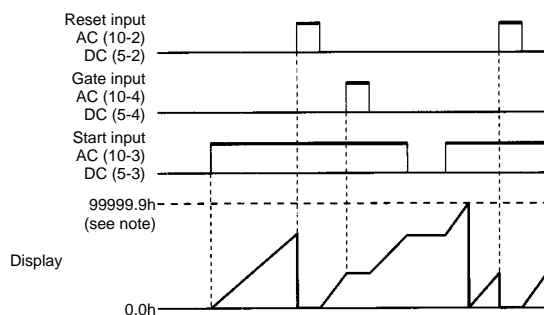


**Note:** 1. Display values are shown for full scale set to 99999.9 h.  
2. Gate input is available only when H7HP-A settings are made.

# Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

H7HP-A  
H7HP-C8

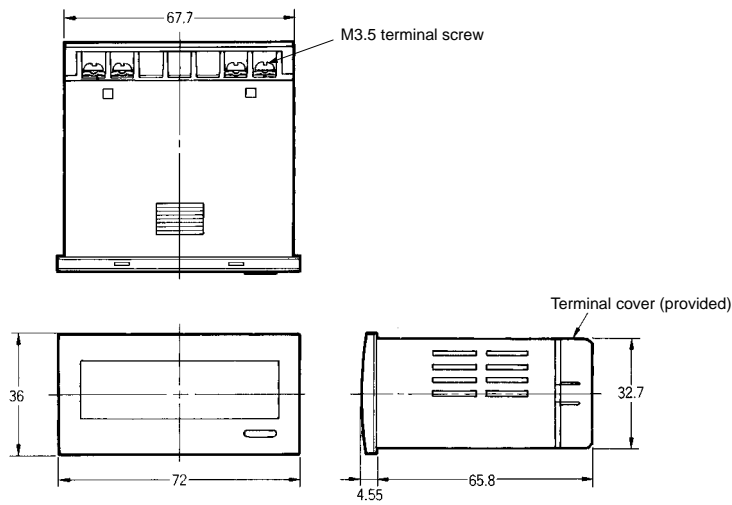


### Panel Cutouts

Panel cutouts are as shown below (according to DIN43700).



- Note:**
1. The mounting panel thickness should be 1 to 6 mm.
  2. Water resistance will be lost if Counters are mounted side-by-side.

### With Flush Mounting Bracket

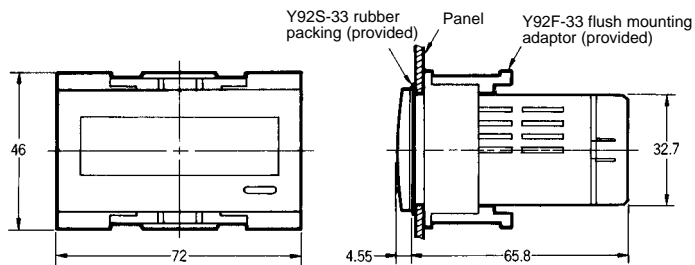


# Installation


## Terminal Arrangement

### AC Models

#### H7HP-A

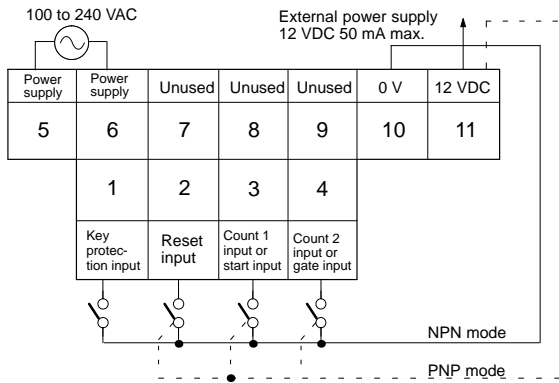


#### H7HP-C8

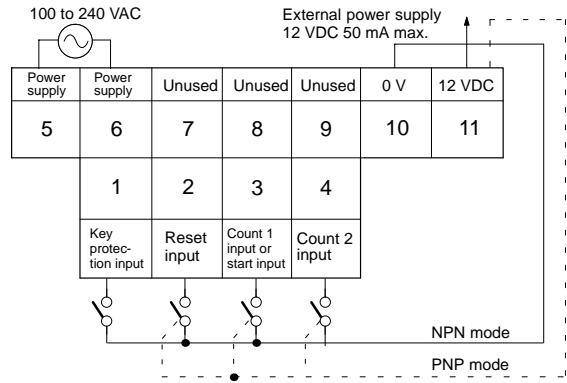


### DC Models

#### H7HP-AD

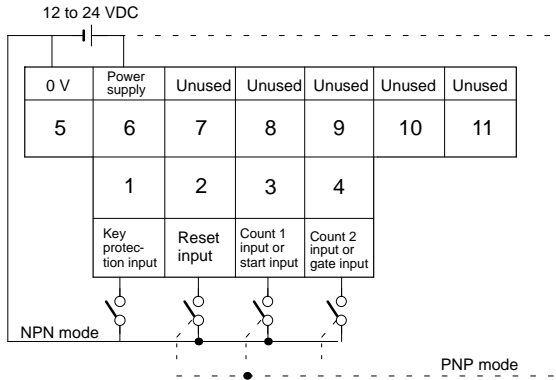

#### H7HP-C8D

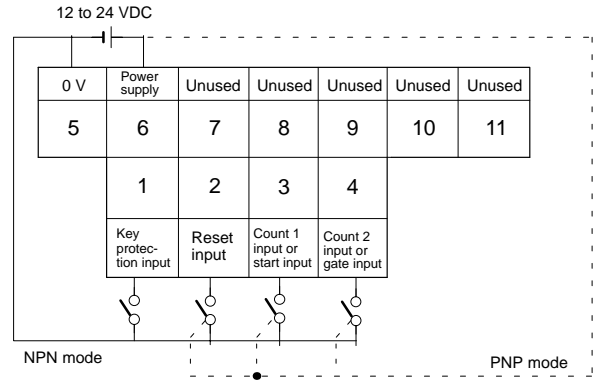


**Note:** Incremented for count 1 (CP1) inputs; decremented for count 2 (CP2) inputs.

## ■ Input Connections

**Note:** The undermentioned is common for all H7GP/H7HP models.

### No-voltage Input (NPN Input Mode)

#### Reset, Count 1, Count 2, and Count Inputs




#### Reset, Count 1, Count 2, and Count Inputs Specification

Short-circuit (ON) impedance: 1 k $\Omega$  max.  
 Short-circuit (ON) residual voltage: 2 VDC max.  
 Current flow for 0- $\Omega$  short-circuit: Approx. 2 mA  
 Open (OFF) impedance: 100 k $\Omega$  min.

**Note:** Two-line sensors cannot be used.

#### Key Protection Input




#### Key Protection Inputs Specification

Short-circuit (ON) impedance: 1 k $\Omega$  max.  
 Short-circuit (ON) residual voltage: 0.5 VDC max.  
 Current flow for 0- $\Omega$  short-circuit: Approx. 0.5 mA  
 Open (OFF) impedance: 100 k $\Omega$  min.

**Note:** Two-line sensors cannot be used.

### Voltage Input (PNP Input Mode)

#### Reset, Count 1, Count 2, and Count Inputs



#### Reset, Count 1, Count 2, and Count Inputs Specification

Short-circuit (ON) impedance: 1 k $\Omega$  max.  
 ON voltage: 9 to 24 VDC  
 OFF voltage: 5 VDC max.  
 Open (OFF) impedance: 100 k $\Omega$  min.

**Note:** Two-line sensors cannot be used.


# Precautions

**Note:** The undermentioned is common for all H7GP/H7HP models.


## Power Supplies

When turning the power ON and OFF, input signal reception is possible, unstable, or impossible as shown in the diagram below.

Apply the power supply voltage through a relay or switch in such a way that the voltage reaches a fixed value immediately.

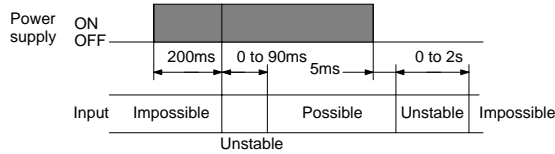

Although the H7GP/H7HP power supply (primary side) is isolated from control circuits (secondary side) by a transformer, the primary and secondary sides of the transformer are linked by a capacitor, making it possible for high-frequency components to leak to the secondary side. Take adequate precautions against electrical shock. Do not connect input circuits to exposed parts (such as the machine body) and be sure that the power supply is turned off before wiring.

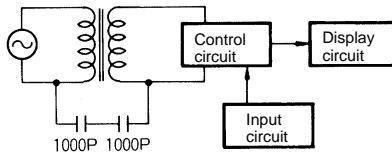

## Self-diagnostic Function


The following displays will appear if an error occurs.

Display	Error	Correction
	-99999 max. (H7HP, 6-digit model) -99999999 max. (H7HP, 8-digit model)	Press RST Key or reset input
E1	CPU	Press RST Key or turn power OFF and then ON
E2	Memory	

## Flush Mounting

The panel surface is water-resistive (conforming to NEMA 4 and IP66). In order to prevent the internal circuit from water penetration through the space between the counter and operating panel, attach a rubber packing between the counter and operating panel and secure the rubber packing with the Y92F-3 flush-mounting adaptor.

Be sure the rubber packing is installed in the correct direction. The wider portion must be facing the panel when installed, as shown in the following illustration. Using a flat-head screwdriver, press in the Mounting Adaptor until it cannot be pressed in any further in order to ensure water-resistive performance.



## Other

Water resistance may deteriorate depending on the environment. Periodically check water resistance.


Oil resistance is not applicable to all types of oil. Be sure to test any specific oils before actual application.

## Labels


Unit labels are included with the H7GP/H7HP and DIP switch labels are included with the H7HP. Attach these labels as shown in the following illustrations.

### Unit Labels

#### H7GP




#### H7HP



### DIP Switch Labels

#### H7HP




## Accessories

The accessories listed in the following table are included with the H7GP/H7HP. Be sure you understand the use of these accessories and use them correctly.



Name	H7GP	H7HP
Rubber packing	Y92S-32	Y92S-33
Flush mounting adaptor	Y92F-32	Y92F-33

Enclosure Ratings


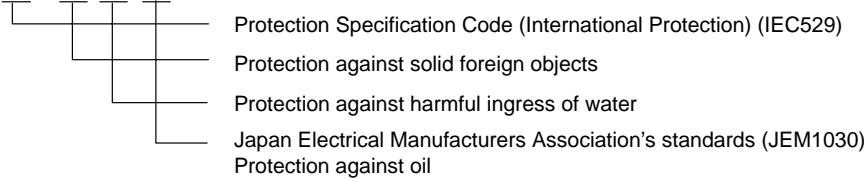


**IP - 6 6 G**



Protection Against Solid Foreign Objects

Grade	Protection	Criteria
5	Dust protected 	Limited ingress of dust permitted (no harmful deposit).
6	Dust-tight 	Totally protected against ingress of dust.

Protection Against Harmful Ingress of Water

Grade	Protection	Criteria	Examination method
5	Housing jets from all directions 	Protected against low-pressure jets of water from all directions; limited ingress permitted.	Spray water from all directions for one minute per m <sup>2</sup> of external surface area and for a total time of no less than 3 minutes using the test device shown below. 
6	Strong hosing jets from all directions 	Protected against strong jets of water, e.g. for use on shipdecks; limited ingress permitted.	Spray water from all directions for one minute per m <sup>2</sup> of external surface area and for a total time of no less than 3 minutes using the test device shown below. 

JEM Standards  
Protection Against Oil

Grade	Protection	Criteria	Criteria
F	Oilproof	Protected against improper operation due to oil drops or spray from any direction.	No penetration of oil to the extent of interfering with proper operation after dropping the specified cutting oil on a test device for 48 hours at a rate of 0.5 l per hour.
G	Oil resistant	Protected against penetration of oil drops or spray from any direction.	No penetration of oil after dropping the specified cutting oil on a test device for 48 hours at a rate of 0.5 l per hour.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. M049-E1-2B In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**

Industrial Automation Company

Measuring and Supervisory Controls Division  
28th Fl., Crystal Tower Bldg.,  
1-2-27, Shiromi, Chuo-ku,  
Osaka 540-6028 Japan  
Phone: (81)6-6949-6035 Fax: (81)6-6949-6069

Printed in Japan  
0499-0.5C (1198)